

High Frequency Ceramic Solutions

2450 MHz Band Pass Filter

P/N 2450BP14E0100

Detail Specification: 01/11/07

Page 1 of 2


General Specifications

Part Number	2450BP14E0100
Frequency (MHz)	2400 - 2500
Attenuation (min.)	35 dB @ 824 - 960 MHz
Attenuation (min.)	38 dB @ 1710 - 1910 MHz
Attenuation (min.)	25 dB @ 4800 - 5000 MHz
Attenuation (min.)	20 dB @ 7200 - 7500 MHz

Insertion Loss	2.5 dB max.
Return Loss	9.5 dB min.
Impedance	50 Ω
Input Power	500 mW max.
Operating Temperature	-40 to +85°C
Storage Temperature	-40 to +85°C
Reel Quantity	4,000


P/N	Packaging Style	Bulk	Suffix = S	Eg. 2450BP14E0100S
		T & R	Suffix = E	Eg. 2450BP14E0100E
Suffix	Termination	100% Tin	Suffix = None	Eg. 2450BP14E0100(E or S)
	Style	Tin / Lead	Suffix = /Pb	Eg. 2450BP14E0100(E or S)/Pb

Terminal Configuration	
No.	Function
1	GND
2	OUT
3	GND
4	IN



Mechanical Dimensions


	In	mm
L	0.063 ± 0.004	1.60 ± 0.10
W	0.031 ± 0.004	0.80 ± 0.10
T	0.024 ± 0.004	0.60 ± 0.10
a	0.028 ± 0.006	0.70 ± 0.15
b	0.012 ± 0.004	0.30 ± 0.10
c	0.006 ± 0.004	0.15 ± 0.10
d	0.018 ± 0.006	0.45 ± 0.15

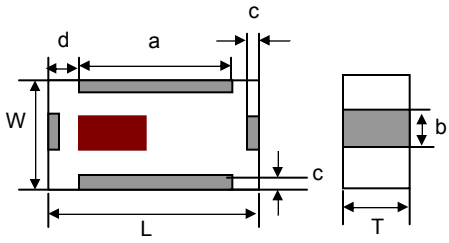

Mounting Considerations

Mount these devices with brown mark facing up.

* Line width should be designed to provide 50 ohm impedance, depending on PCB material and thickness

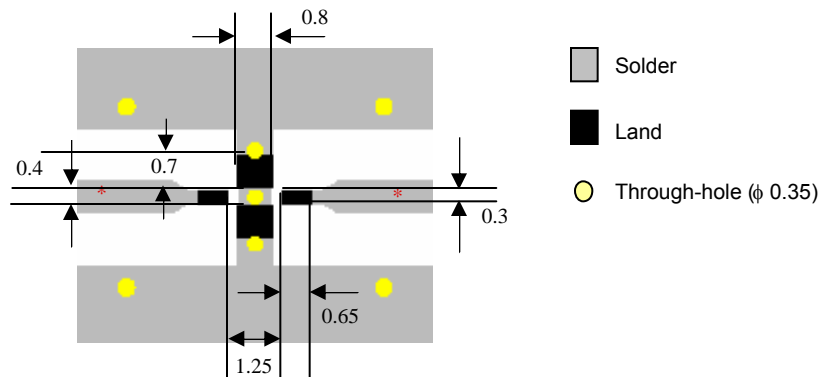

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.

High Frequency Ceramic Solutions


2450 MHz Band Pass Filter

P/N 2450BP14E0100

Detail Specification: 01/11/07

Page 2 of 2

Typical Electrical Performance (T=25°C)

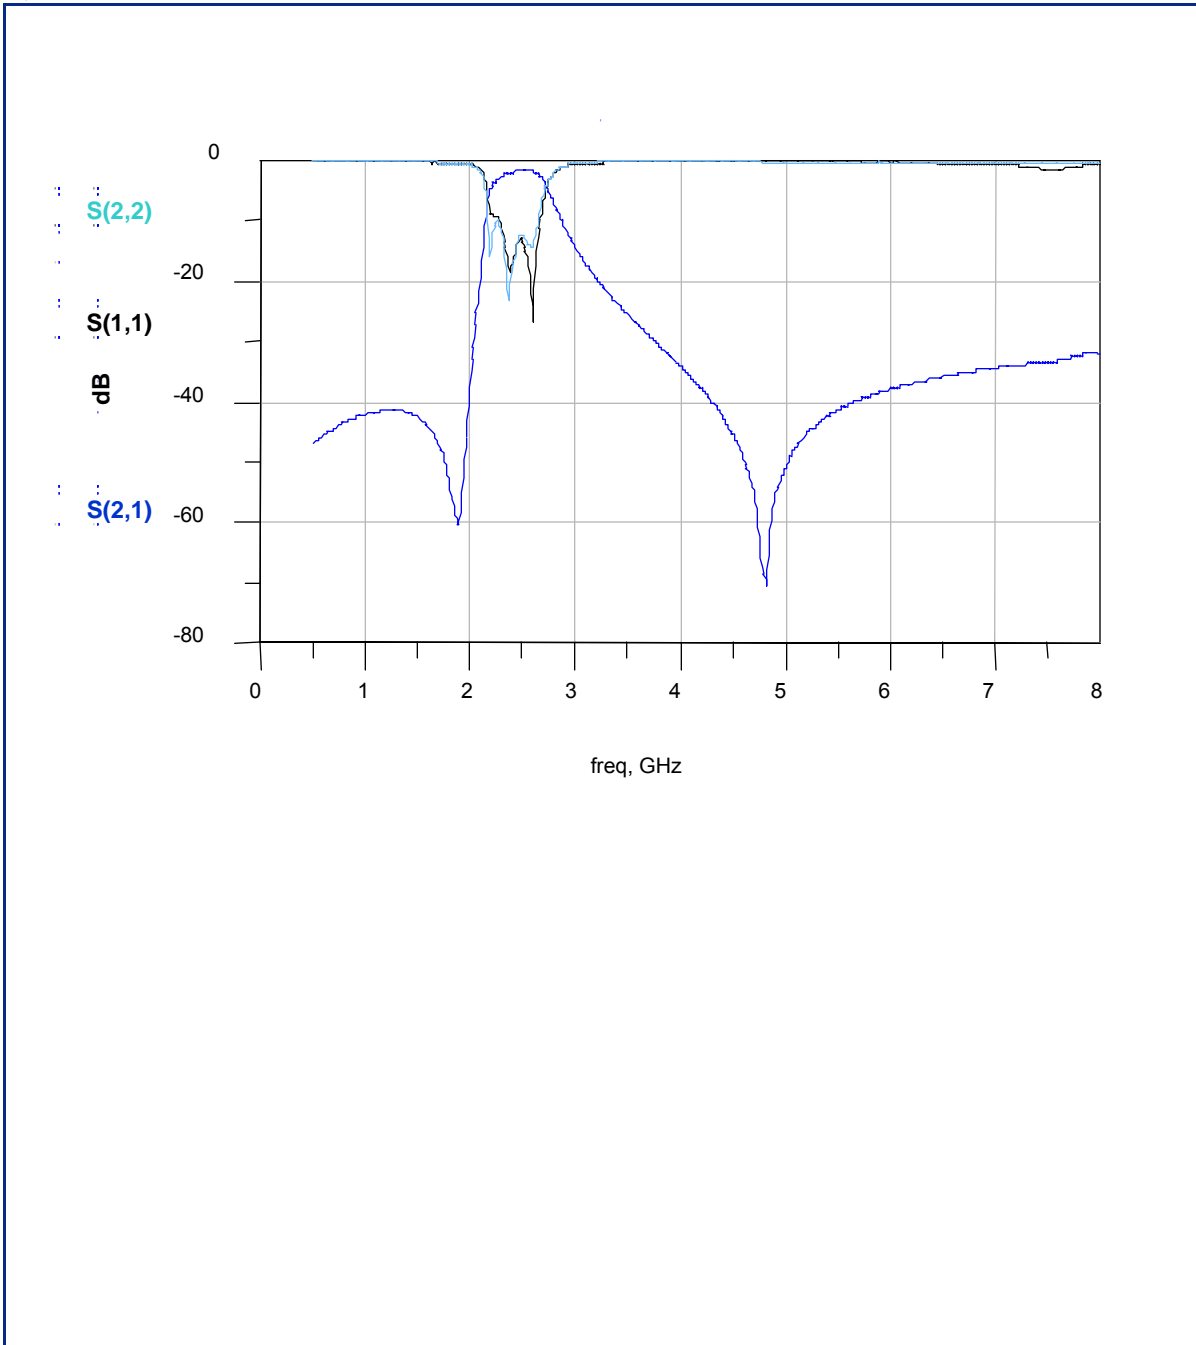

Johanson Technology, Inc. reserves the right to make design changes without notice.
All sales are subject to Johanson Technology, Inc. terms and conditions.



www.johansontechology.com
931 Via Alondra • Camarillo, CA 93012 • TEL 805.389.1166 FAX 805.389.1821

2003 Johanson Technology, Inc. All Rights Reserved